

# **IDSL3LR-02S08G-Z7**

Din-Rail Industrial L3 Lite Managed Switch

8x10/100/1000M RJ45, 2x1000M SFP



## **Overview**

IDSL3LR-02S08G-Z7 is an Industrial Ethernet Managed Switch, with 8x10/100/1000Mbps auto-negotiation RJ45 ports and 2xGigabit SFP interfaces. Leveraging fanless heat dissipation circuit design, wide operating temperature range, and high protection level, it delivers outstanding industrial grade performance, high and low temperature tolerance and lightning protection capabilities. It integrates diverse protocols essential for switching and security functions and supports the public domain Ethernet Ring Protection Switching (ERPS) technology, greatly enhancing network - building flexibility while strengthening the reliability and security of industrial networks. This makes it well suited to meet the deployment demands in applications like rail transit, smart cities, intelligent transportation, outdoor surveillance, and other harsh environments.

## **Features**

- Input voltage: Redundant DC12-58V input
- Operating Temperature: -40°C ~ +75°C
- Shell: IP40 protection, fanless design
- Test Report: RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100,000 Hours

## Specifications

Fixed Port	8x10/100/1000M RJ45, 2x1000M SFP
Management Port	1xRJ45 console port
Power Interface	Phoenix terminal, dual power supply redundancy
LED Indicators	PWR, Link/ACT LED
<b>Cable Type &amp; Transmission Distance</b>	
Twisted-pair	0-100m (CAT5e, CAT6)
Monomode Optical Fiber	20/40/60/80/100KM
Multimode Optical Fibre	550m
<b>Network Topology</b>	
Ring Topology	Support
Star Topology	Support
Bus Topology	Support
Tree Topology	Support
Hybrid Topology	Support
<b>Electrical Specifications</b>	
Input Voltage	Redundant DC12-58V input
Total Power Consumption	Non-PoE<10w
<b>Layer 2 Switching</b>	
Switching Capacity	20G
Packet Forwarding Rate	14.88Mpps
MAC Address Table	8K
Buffer	4.1M
Forwarding Delay	<10us
MDI/MDIX	Support
VLAN	256
GVRP	Support
Protocol VLAN	Support
Voice VLAN	Support
Surveillance VLAN	Support

MAC VLAN	Support
QINQ	Support
Ether Channel/ 802 .3ad	Support
LACP	Support
Interface Speed	Support
Duplex Mode	Support
Flow Control	Support
Jumbo Frame	Support
DHCP Client	Support
SNTP Client	Support
Port Statistics	Support
Protected Ports	Support
EEE	Support
ERPS	Support
LLDP	Support
LLDP 802.1 TLV	Support
MSTP / RSTP / STP	Support
STP BPDU Filter	Support
STP BPDU Guard	Support
STP Port Fast	Support
IGMP Snooping	Support
MLD Snooping	Support
MVR	Support
DHCP	Support
Device Scanning	Support
<b>Layer 3 Function</b>	
IPV4	Support
IPV6	Support
Static Routes IPv4	Support
Static Routes IPv6	Support
ARP	Support

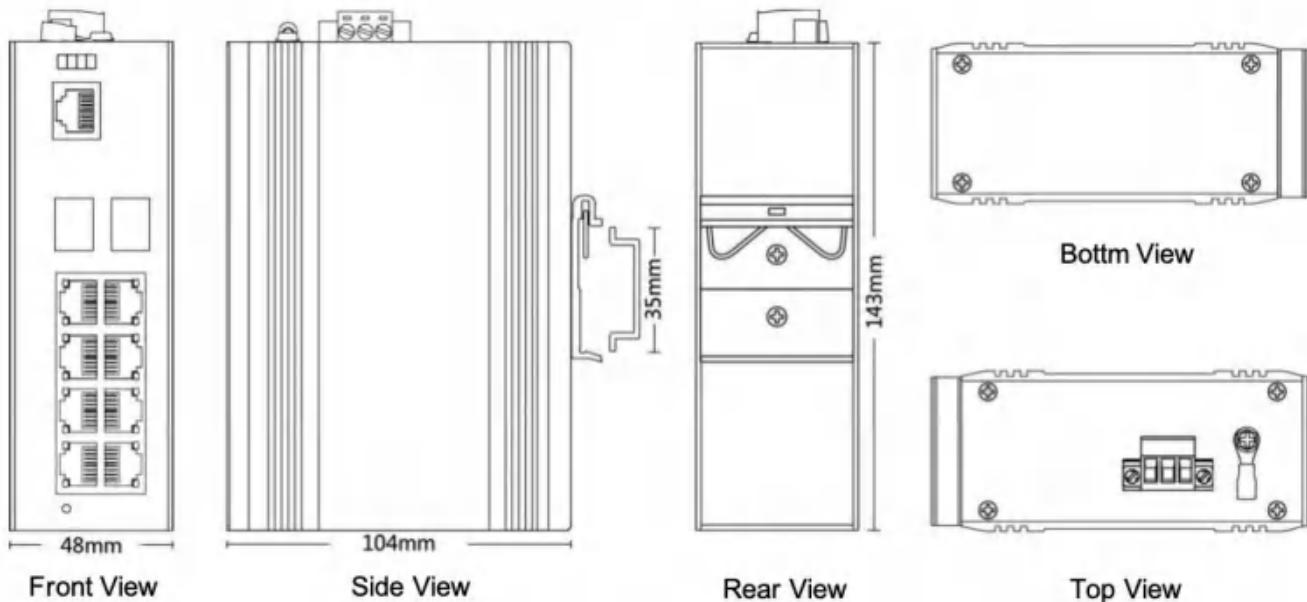
Loopback Interface	Support
DHCP Server	Support
DNS Server	Support
<b>Convergence</b>	
ACL	<ul style="list-style-type: none"> <li>Supports MAC standard/extended ACL</li> <li>Supports IPv4 standard/extended ACL</li> <li>Supports IPv6 standard/extended ACL</li> </ul>
QOS	<ul style="list-style-type: none"> <li>Supports QoS remarking</li> <li>Supports port trust</li> <li>Supports port rate limiting</li> <li>Supports egress queue rate limiting</li> <li>Supports SP and WRR scheduling algorithms</li> <li>Supports CoS mapping, DSCP mapping, and IP priority mapping</li> </ul>
<b>Management</b>	
User Management	Support
System Log	Support
Upgrade Firmware	Support
Configuration File Download/Upload	Support
SNMP	Support SNMP V1/V2/V3
WEB	Support
CLI	Support
Telnet/SSH	Support
RMON	Support
<b>Security</b>	
Management Channel Configuration	Support
AAA Authentication	Support
802.1X Authentication	Support
MAC-based Authentication	Support
Web-Based authentication	Support
DoS Attack Prevention	Support
Dynamic ARP Inspection	Support
DHCP Snooping	Support

IP Source Guard	Support
Port Security	Support
Protected Ports	Support
Storm Control	Support
<b>Equipment Diagnosis</b>	
RAM	Support
Flash	Support
Port Mirroring	Support 1:1 or M:1
Ping	Support
Trace Route	Support
Port Testing	Support
Optical Module DDM	Support
UDLD Protocol	Support
<b>Mechanical Dimensions</b>	
Product Size	48x104x143mm
Installation Method	Rail-mounted installation
Net Weight	0.55kg
<b>Environment</b>	
Operating Temperature	-40°C~+75°C
Storage Temperature	-40°C~+85°C
Relative Humidity	5%~95% non-condensing)
Thermal Methods	Fanless design, natural cooling
MTBF	100, 000 hours
<b>EMC &amp; Ingress Protection</b>	
IP Level	IP40
Surge Protection of Power	Common mode 4KV, differential mode 2KV
Surge Protection of Ethernet port	Common mode 4KV, differential mode 2KV
ESD	Contact 8K, air 15K
Free Fall	0.5m
<b>Certification</b>	
Certificates	CE/FCC/RoHS

**Warranty**

Warranty

3-Year

**Dimension****Ordering Information**

PART NO	DESCRIPTION
IDSL3LR-02S08G-Z7	Din-Rail Industrial L3 Lite Managed Switch 8x10/100/1000M RJ45, 2x1000M SFP



<https://www.lanaotek.com>



Specifications & design are subject to change without prior notice.

For more details, please email to [info@lanaotek.com](mailto:info@lanaotek.com). Copyright©2024 lanaotek.com All Rights Reserved