

IDSL3LR-04S16G-Z7

Din-Rail Industrial L3 Lite Managed Switch

16x10/100/1000M RJ45, 4x1000M SFP



Overview

IDSL3LR-04S16G-Z7 is an Industrial Ethernet Managed Switch, with 16x10/100/1000Mbps auto-negotiation RJ45 ports and 4xGigabit SFP interfaces. Leveraging fanless heat dissipation circuit design, wide operating temperature range, and high protection level, it delivers outstanding industrial grade performance, high and low temperature tolerance and lightning protection capabilities. It integrates diverse protocols essential for switching and security functions and supports the public domain Ethernet Ring Protection Switching (ERPS) technology, greatly enhancing network - building flexibility while strengthening the reliability and security of industrial networks. This makes it well suited to meet the deployment demands in applications like rail transit, smart cities, intelligent transportation, outdoor surveillance, and other harsh environments.

Features

- Input voltage: Redundant DC12-58V input
- Operating Temperature: -40°C ~ +75°C
- Shell: IP40 protection, fanless design
- Test Report: RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100,000 Hours

Specifications

Fixed Port	16x10/100/1000M RJ45, 4x1000M SFP
Management Port	1xRJ45 console port
Power Interface	Phoenix terminal, dual power supply redundancy
LED Indicators	PWR, Link/ACT LED
Cable Type & Transmission Distance	
Twisted-pair	0-100m (CAT5e, CAT6)
Monomode Optical Fiber	20/40/60/80/100KM
Multimode Optical Fibre	550m
Network Topology	
Ring Topology	Support
Star Topology	Support
Bus Topology	Support
Tree Topology	Support
Hybrid Topology	Support
Electrical Specifications	
Input Voltage	Redundant DC12-58V input
Total Power Consumption	Non-PoE<15w
Layer 2 Switching	
Switching Capacity	56Gbps
Packet Forwarding Rate	41.66Mpps
MAC Address Table	8K
Buffer	4.1M
Forwarding Delay	<10us
MDI/MDIX	Support
VLAN	256
GVRP	Support
Protocol VLAN	Support
Voice VLAN	Support
Surveillance VLAN	Support

MAC VLAN	Support
QINQ	Support
Ether Channel/ 802 .3ad	Support
LACP	Support
Interface Speed	Support
Duplex Mode	Support
Flow Control	Support
Jumbo Frame	Support
DHCP Client	Support
SNTP Client	Support
Port Statistics	Support
Protected Ports	Support
EEE	Support
ERPS	Support
LLDP	Support
LLDP 802.1 TLV	Support
MSTP / RSTP / STP	Support
STP BPDU Filter	Support
STP BPDU Guard	Support
STP Port Fast	Support
IGMP Snooping	Support
MLD Snooping	Support
MVR	Support
DHCP	Support
Device Scanning	Support
Layer 3 Function	
IPV4	Support
IPV6	Support
Static Routes IPv4	Support
Static Routes IPv6	Support
ARP	Support


Loopback Interface	Support
DHCP Server	Support
DNS Server	Support
Convergence	
ACL	Supports MAC standard/extended ACL Supports IPv4 standard/extended ACL Supports IPv6 standard/extended ACL
QOS	Supports QoS remarking Supports port trust Supports port rate limiting Supports egress queue rate limiting Supports SP and WRR scheduling algorithms Supports CoS mapping, DSCP mapping, and IP priority mapping
Management	
User Management	Support
System Log	Support
Upgrade Firmware	Support
Configuration File Download/Upload	Support
SNMP	Support SNMP V1/V2/V3
WEB	Support
CLI	Support
Telnet/SSH	Support
RMON	Support
Security	
Management Channel Configuration	Support
AAA Authentication	Support
802.1X Authentication	Support
MAC-based Authentication	Support
Web-Based authentication	Support
DoS Attack Prevention	Support
Dynamic ARP Inspection	Support
DHCP Snooping	Support
IP Source Guard	Support

Port Security	Support
Protected Ports	Support
Storm Control	Support
Equipment Diagnosis	
RAM	Support
Flash	Support
Port Mirroring	Support 1:1 or M:1
Ping	Support
Trace Route	Support
Port Testing	Support
Optical Module DDM	Support
UDLD Protocol	Support
Mechanical Dimensions	
Product Size	161x104x68mm
Installation Method	Rail-mounted installation
Net Weight	0.88kg
Environment	
Operating Temperature	-40°C~+75°C
Storage Temperature	-40°C~+85°C
Relative Humidity	5%~95% non-condensing)
Thermal Methods	Fanless design, natural cooling
MTBF	100, 000 hours
EMC & Ingress Protection	
IP Level	IP40
Surge Protection of Power	Common mode 4KV, differential mode 4KV
Surge Protection of Ethernet port	Common mode 4KV, differential mode 4KV
ESD	Contact 8K, air 15K
Free Fall	0.5m
Certification	
Certificates	CE/FCC/RoHS

Warranty

Warranty	3-Year
----------	--------

Dimension

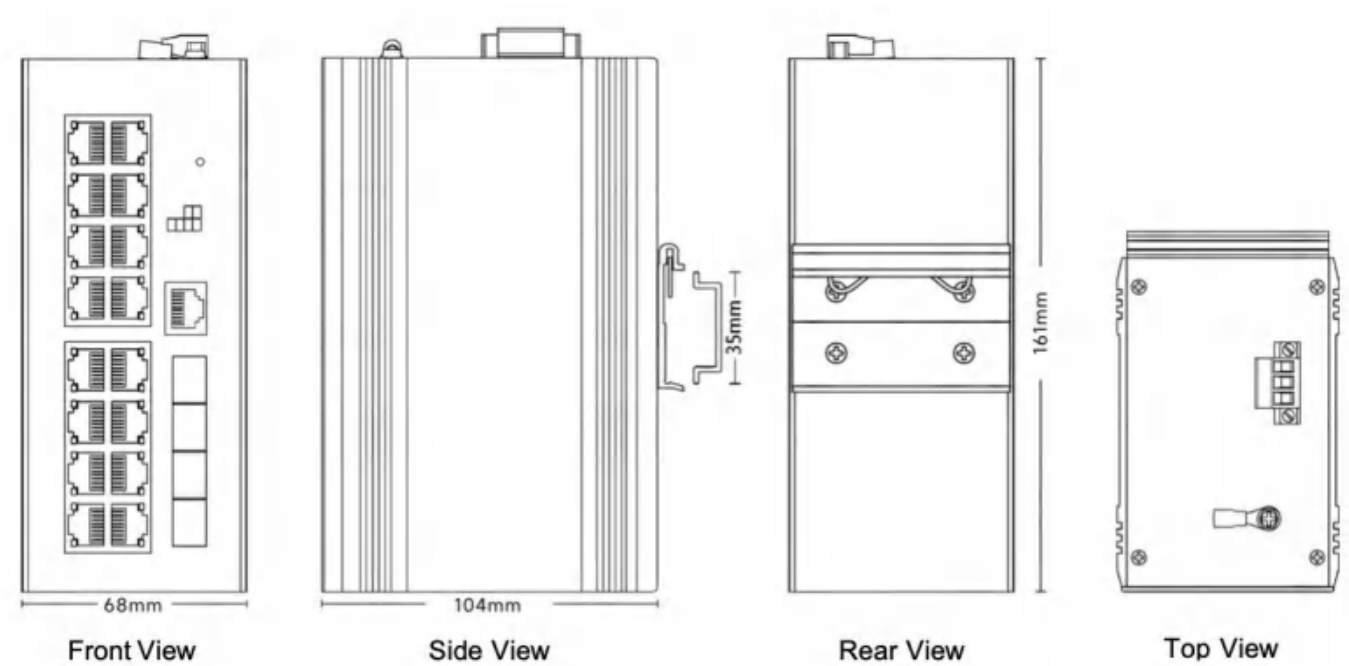

Ordering Information

PART NO	DESCRIPTION
IDSL3LR-04S16G-Z7	Din-Rail Industrial L3 Lite Managed Switch 16x10/100/1000M RJ45, 4x1000M SFP Redundant DC12-58V input



<https://www.lanaotek.com>



Specifications & design are subject to change without prior notice.

For more details, please email to info@lanaotek.com. Copyright©2024 lanaotek.com All Rights Reserved