

# **IDSL3R-04S08G-Z7**

Din-Rail Industrial L3 Managed Switch

8x10/100/1000M RJ45, 4x1G SFP



## **Overview**

IDSL3R-04S08GP-Z7 is a DIN-rail mounted industrial switch combines Layer 3 routing with 8x10/100/1000M ports and 4x1G SFP interfaces. Leveraging fanless heat dissipation circuit design, wide operating temperature range -40 ° C to +75 ° C, and IP40 high protection level , it delivers outstanding industrial grade performance, high and low temperature tolerance and lightning protection capabilities. It integrates diverse protocols essential for switching and security functions and supports the public domain Ethernet Ring Protection Switching (ERPS) technology, greatly enhancing network - building flexibility while strengthening the reliability and security of industrial networks. This makes it well suited to meet the deployment demands in applications like rail transit, smart cities, intelligent transportation, outdoor surveillance, and other harsh environments.

## **Features**

- Input voltage: Redundant DC12-58V input
- Operating Temperature: -40°C ~ +75°C
- Shell: IP40 protection, fanless design
- Test Report: RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100,000 Hours

## Specifications

Fixed Port	8x10/100/1000M RJ45, 4x1G SFP
Management Port	1xRJ45 console port
Power Interface	Phoenix terminal, dual power supply redundancy
LED Indicators	PWR, Link/ACT LED
<b>Cable type &amp; Transmission distance</b>	
Twisted-pair	0-100m (CAT5e, CAT6)
Monomode Optical Fiber	20/40/60/80/100KM
Multimode Optical Fibre	550m
<b>Network Topology</b>	
Ring Topology	Support
Star Topology	Support
Bus Topology	Support
Tree Topology	Support
Hybrid Topology	Support
<b>Electrical Specifications</b>	
Input Voltage	Redundant DC12-58V input
Total Power Consumption	Non-PoE<10w
<b>Layer 2 Switching</b>	
Switching Capacity	128Gbps
Packet Forwarding Rate	95.23Mpps
MAC Address Table	16K
Buffer	12M
Forwarding Delay	<10us
MDI/MDIX	Support
VLAN	4K
GVRP	Support
Protocol VLAN	Support
Voice VLAN	Support
Surveillance VLAN	Support

MAC VLAN	Support
QINQ	Support
Ether Channel/ 802 .3ad	Support
LACP	Support
Interface Speed	Support
Duplex Mode	Support
Flow Control	Support
Jumbo Frame	Support
DHCP Client	Support
SNTP Client	Support
Port Statistics	Support
Protected Ports	Support
EEE	Support
ERPS	Support
LLDP	Support
LLDP 802.1 TLV	Support
MSTP / RSTP / STP	Support
STP BPDU Filter	Support
STP BPDU Guard	Support
STP Port Fast	Support
IGMP Snooping	Support
MLD Snooping	Support
MVR	Support
DHCP	Support
Device Scanning	Support
<b>Layer 3 Function</b>	
IPV4 Mgmt Address	Support
IPV6 Mgmt Address	Support
Dynamic Routes IPv4	Support OSFP, RIP
Static Routes IPv6	Support
ARP	Support

Loopback Interface	Support
<b>Convergence</b>	
ACL	Supports MAC standard/extended ACL Supports IPv4 standard/extended ACL Supports IPv6 standard/extended ACL
QOS	Supports QoS remarking Supports port trust Supports port rate limiting Supports egress queue rate limiting Supports SP and WRR scheduling algorithms Supports CoS mapping, DSCP mapping, and IP priority mapping
<b>Management</b>	
User Management	Support
System Log	Support
Upgrade Firmware	Support
Configuration	Support
File Download/Upload	Support
SNMP	Support SNMP V1/V2/V3
WEB	Support
CLI	Support
Telnet/SSH	Support
RMON	Support
<b>Security</b>	
Management Channel Configuration	Support
AAA Authentication	Support
802.1X Authentication	Support
MAC-based Authentication	Support
Web-Based authentication	Support
DoS Attack Prevention	Support
Dynamic ARP Inspection	Support
DHCP Snooping	Support
IP Source Guard	Support
Port Security	Support
Protected Ports	Support

Storm Control	Support
---------------	---------

**Equipment Diagnosis**

Console Log	Support
-------------	---------

RAM Log	Support
---------	---------

Flash Log	Support
-----------	---------

Port Mirroring	Support 1:1 or M:1
----------------	--------------------

Ping	Support
------	---------

Trace Route	Support
-------------	---------

Port Testing	Support
--------------	---------

Optical Module DDM	Support
--------------------	---------

UDLD Protocol	Support
---------------	---------

**Mechanical Dimensions**

Product Size	56x116x161mm
--------------	--------------

Installation Method	Rail-mounted installation
---------------------	---------------------------

Net Weight	0.96kg
------------	--------

**Environment**

Operating Temperature	-40°C~+75°C
-----------------------	-------------

Storage Temperature	-40°C~+85°C
---------------------	-------------

Relative Humidity	5%~95% non-condensing)
-------------------	------------------------

Thermal Methods	Fanless design, natural cooling
-----------------	---------------------------------

MTBF	100, 000 hours
------	----------------

**EMC & INGRESS PROTECTION**

IP Level	IP40
----------	------

Surge Protection of Power	Common mode 6KV, differential mode 6KV
---------------------------	--

Surge Protection of Ethernet port	Common mode 4KV, differential mode 2KV
-----------------------------------	--

ESD	Contact 8K, air 15K
-----	---------------------

Free Fall	0.5m
-----------	------


**Certification**

Certificates	CE/FCC/RoHS
--------------	-------------

**Warranty**

Warranty	3-Year
----------	--------

## Dimension

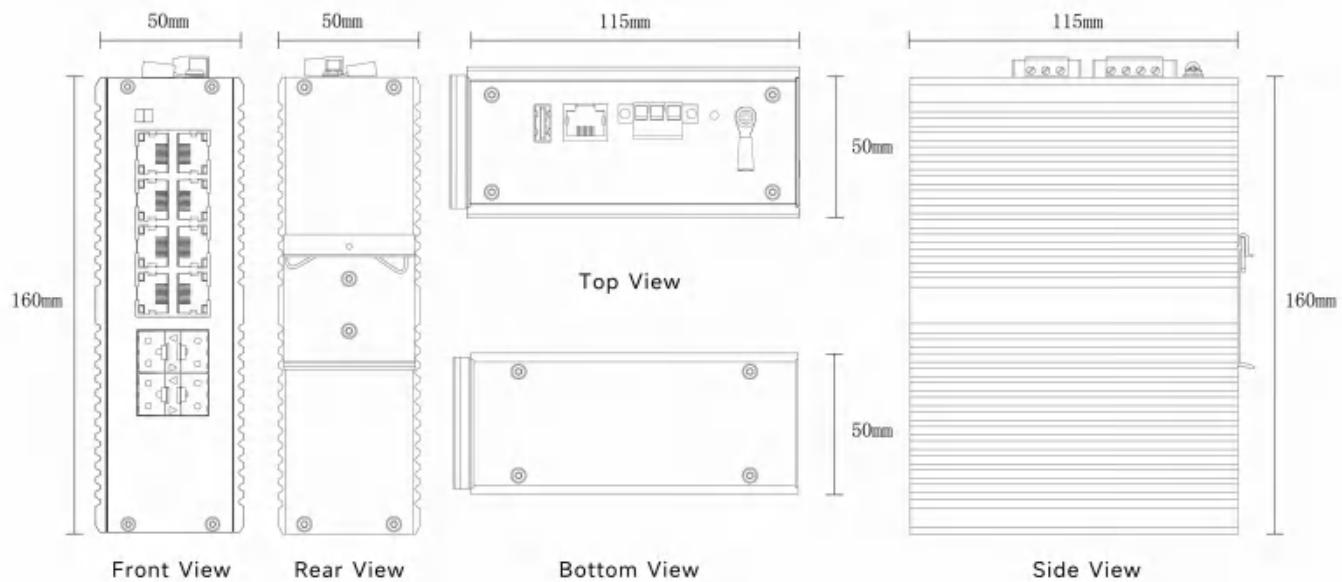

## Ordering Information

PART NO	DESCRIPTION
IDS-L3R-04S08G-Z7	Din-Rail Industrial L3 Managed Switch 8x10/100/1000M RJ45, 4x1G SFP Redundant DC12-58V input



<https://www.lanaotek.com>



Specifications & design are subject to change without prior notice.

For more details, please email to [info@lanaotek.com](mailto:info@lanaotek.com). Copyright©2024 lanaotek.com All Rights Reserved