

IRSL2M-04X24GHP-Z7

Rackmount Industrial L2 Managed PoE++ Switch

24x10/100/1000M RJ45 PoE+, Uplink 4x10G SFP+



Overview

Din-Rail Industrial L2 Managed PoE Switch features 24x10/100/1000M RJ45 PoE+ ports and 4x10G SFP+ uplinks. Ports 1-2 & 23-24 support PoE++ BT 90W for high-power devices, ideal for IP cameras, wireless APs, and high-bandwidth applications. Designed for harsh environments, it offers robust L2 management, PoE power budgeting, and industrial-grade reliability, with fan-less cooling circuit design, wide range working temperature -40 ° C to +75 ° C, lightning protection and integrated switching for mission-critical applications in harsh environments. With rich protocols, ERPS has greatly enhanced the flexibility of the network and enhanced the reliability and security of the industrial network. It can also meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other applications.

Features

- Input Voltage: Redundant DC48-58V input
- Operating Temperature: -40°C ~ +75°C
- Shell: IP40 protection, fanless design
- Test Report: RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100,000 Hours

Specifications


Fixed Port	24x10/100/1000M RJ45, 4x10G SFP+
Management Port	1xRJ45 console port
Power Interface	Phoenix terminal, redundant dual power supply
LED Indicators	PWR, Link/ACT LED
Cable Type & Transmission Distance	
Twisted-pair	0-100m (CAT5e, CAT6)
Single Mode Optical Fiber	20/40/60/80/100KM
Multimode Optical Fiber	550m
Network Topology	
Ring Topology	Support
Star Topology	Support
Bus Topology	Support
Tree Topology	Support
Hybrid Topology	Support
Electrical Specifications	
Input Voltage	Redundant DC48-58V input
Total Power Consumption	PoE<386w (PoE Budget 360w)
PoE++	
PoE Port	1-24
PoE Protocol	IEEE802.3af PoE 15.4w IEEE802.3at PoE+ 30w IEEE802.3bt PoE++ 90w (Port 1-2 and Port 23-24)
Pin Assignment	1245+, 3678-
PoE Management	Support
Layer 2 Switching	
Switching Capacity	128G
Packet Forwarding Rate	101.2Mpps
MAC Address Table	16K
VLAN	Support 4K
Buffer	12M

Forwarding Delay	<10us
MDX/MIDX	Support
Flow Control	Support
Jumbo Frame	Support 10Kbytes
Spanning Tree	Support STP/RSTP/MSTP
Ring Protocol	Support ERPS
Link Aggregation	Support 64 groups
Multicast	Support IGMP Snooping
Port Mirroring	Support SPAN and RSPAN
Storm Control	Support
Interface Counters	Support
QINQ	Support
802.1X	Support
MAC Authentication	Support
Port Isolation	Support
Rmon	Support
NTP Client	Support
DHCP Client	Support
DHCP Snooping	Support
PING/Tracert Detection	Support
Dying Gasp	Support
DDM	Support
Port Security	Support
IP Source Guard	Support
Device Scan	Support
Layer 3 Function	
Static Routes IPv4/IPv6	Support 256
ARP	ARP entry aging
DHCP Server	Support
Convergence	

ACL	Support ACL 240 Support IP standard ACL/ACLv6 Support MAC expand ACL/ACLv6 Support IP expand ACL/ACLv6
QOS	Support QoS re-marking, priority mapping Support SP, WRR queue scheduling Support egress rate-limited, egress rate-limit Support Policy-based QoS
DdoS Attack	Support
Management	
CLI	Support
Console	Support
Telnet/SSH	Support
WEB Management	Support
IP Management	Support IPV4/IPV6
SNMP	Support SNMPv1/v2c/v3
User Management	Support
System Log	Support
Configuration File Download/Upload	Support
Upgrade Firmware	Support
Environment	
Operating Temperature	-40℃~+75℃
Storage Temperature	-40℃~+75℃
Relative Humidity	5%~95% (non-condensing)
Thermal Methods	Fan-less design
MTBF	100,000 hours
Mechanical Dimensions	
Product Size	94*104*143mm
Installation Method	Dinrail mount
Net Weight	1.0KG
EMC & Ingress Protection	
IP Level	IP40

Surge Protection of Power	IEC 61000-4-5 Level X (6KV/6KV) (1.2/50us)
Surge Protection of Ethernet Port	IEC 61000-4-5 Level 4 (4KV/4KV) (10/700us)
RS	IEC 61000-4-3 Level 3 (10V/m)
EFI	IEC 61000-4-4 Level 3 (1V/2V)
CS	IEC 61000-4-6 Level 3 (10V/m)
PFMF	IEC 61000-4-8 Level 4 (30A/m)
DIP	IEC 61000-4-11 Level 3 (10V)
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Free Fall	0.5m
Certification	
Certificates	CE/FCC/RoHS
Warranty	
Warranty	3-Year

Dimension

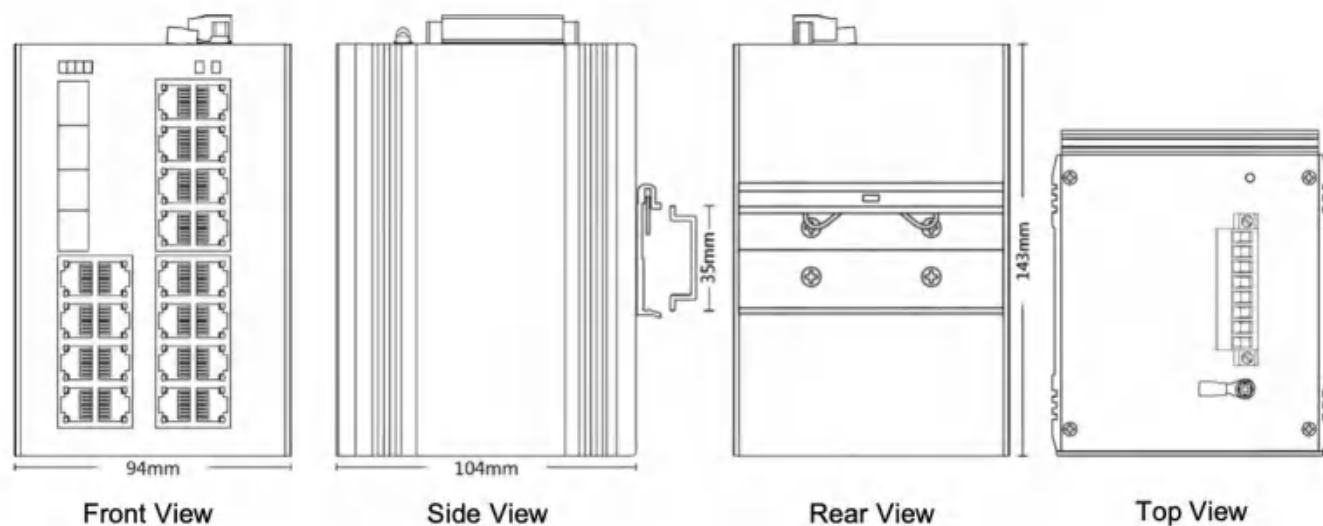

Ordering Information

PART NO	DESCRIPTION
IRSL2M-04X24GHP-Z7	Din-Rail Industrial L2 Managed PoE++ Switch 24x10/100/1000M RJ45 PoE+, Uplink 4x10G SFP+ Port 1-2 and Port 23-24 Support PoE++ BT 90w Redundant DC48-58V input



<https://www.lanaotek.com>



Specifications & design are subject to change without prior notice.

For more details, please email to info@lanaotek.com. Copyright©2024 lanaotek.com All Rights Reserved