

IRSL3LM-04X24GP-2D-Z8

Rackmount Industrial L3 Lite Managed PoE Switch
24x10/100/1000M RJ45 PoE+, Uplink 4x10G SFP+



Overview

The Rackmount Industrial L2 Managed PoE Switch features 24x10/100/1000M RJ45 PoE+ ports with 4x10G SFP+ uplinks, ensuring high-speed connectivity and power delivery. Designed for harsh environments -40 ° C to +75 ° C, it offers advanced L2 management, robust PoE+ support (30W per port), and reliable industrial-grade performance. Ideal for surveillance, IoT, and industrial networks, it ensures stable, high-bandwidth data transmission with redundant power and wide-temperature operation. Compact, rugged, and scalable for demanding applications.

Features

- Input Voltage: Redundant DC48-58V input
- Operating Temperature: -40°C ~ +75°C
- Shell: IP40 protection, fanless design
- Test Report: RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100,000 Hours

Specifications

Fixed Port	24x10/100/1000M RJ45, 4x10G SFP+
Management Port	1xRJ45 console port
Power Interface	Phoenix terminal, redundant dual power supply
LED Indicators	PWR, Link/ACT LED
Cable Type & Transmission Distance	
Twisted-pair	0-100m (CAT5e, CAT6)
Single Mode Optical Fiber	20/40/60/80/100KM
Multimode Optical Fiber	550m
Network Topology	
Ring Topology	Support
Star Topology	Support
Bus Topology	Support
Tree Topology	Support
Hybrid Topology	Support
Electrical Specifications	
Input Voltage	Redundant DC48-58V input
Total Power Consumption	PoE<396w
PoE Interface	
PoE Port	1-24
PoE Protocol	IEEE802.3af PoE 15.4w IEEE802.3at PoE+ 30w
Pin Assignment	1, 2+, 3, 6-
PoE Management	Support
Layer 2 Switching	
Switching Capacity	160G
Packet Forwarding Rate	95.23Mpps
MAC Address Table	16K
VLAN	Support 4K
Buffer	12M
Forwarding Delay	<10us

MDX/MIDX	Support
Flow Control	Support
Jumbo Frame	Support 10Kbytes
Spanning Tree	Support STP/RSTP/MSTP
Ring Protocol	Support ERPS
Link Aggregation	Support 64 groups
Multicast	Support IGMP Snooping
Port Mirroring	Support SPAN and RSPAN
Storm Control	Support
Interface Counters	Support
QINQ	Support
802.1X	Support
MAC Authentication	Support
Port Isolation	Support
Rmon	Support
NTP Client	Support
DHCP Client	Support
DHCP Snooping	Support
PING/Tracert Detection	Support
Dying Gasp	Support
DDM	Support
Port Security	Support
IP Source Guard	Support
Device Scan	Support
Layer 3 Function	
Static Routes IPv4/IPv6	Support 256
ARP	ARP entry aging
DHCP Server	Support
Convergence	

ACL	Support ACL 240
	Support IP standard ACL/ACLv6
	Support MAC expand ACL/ACLv6
	Support IP expand ACL/ACLv6
QoS	Support QoS re-marking, priority mapping
	Support SP, WRR queue scheduling
	Support ingress rate-limited, egress rate-limit
	Support Policy-based QoS
DDoS Attack	Support
Management	
CLI	Support
Console	Support
Telnet/SSH	Support
WEB Management	Support
IP Management	Support IPV4/IPV6
SNMP	Support SNMPv1/v2c/v3
User Management	Support
System Log	Support
Configuration File Download/Upload	Support
Upgrade Firmware	Support
Environment	
Operating Temperature	-40°C ~ +75°C
Storage Temperature	-40°C ~ +75°C
Relative Humidity	5% ~ 95% (non-condensing)
Thermal Methods	Fan-less design
MTBF	100,000 hours
Mechanical Dimensions	
Product Size	440*245*44mm
Installation Method	Rack mount
Net Weight	3.6KG
EMC & Ingress Protection	
IP Level	IP40
Surge Protection of Power	IEC 61000-4-5 Level X (8KV/8KV)(8/20us)

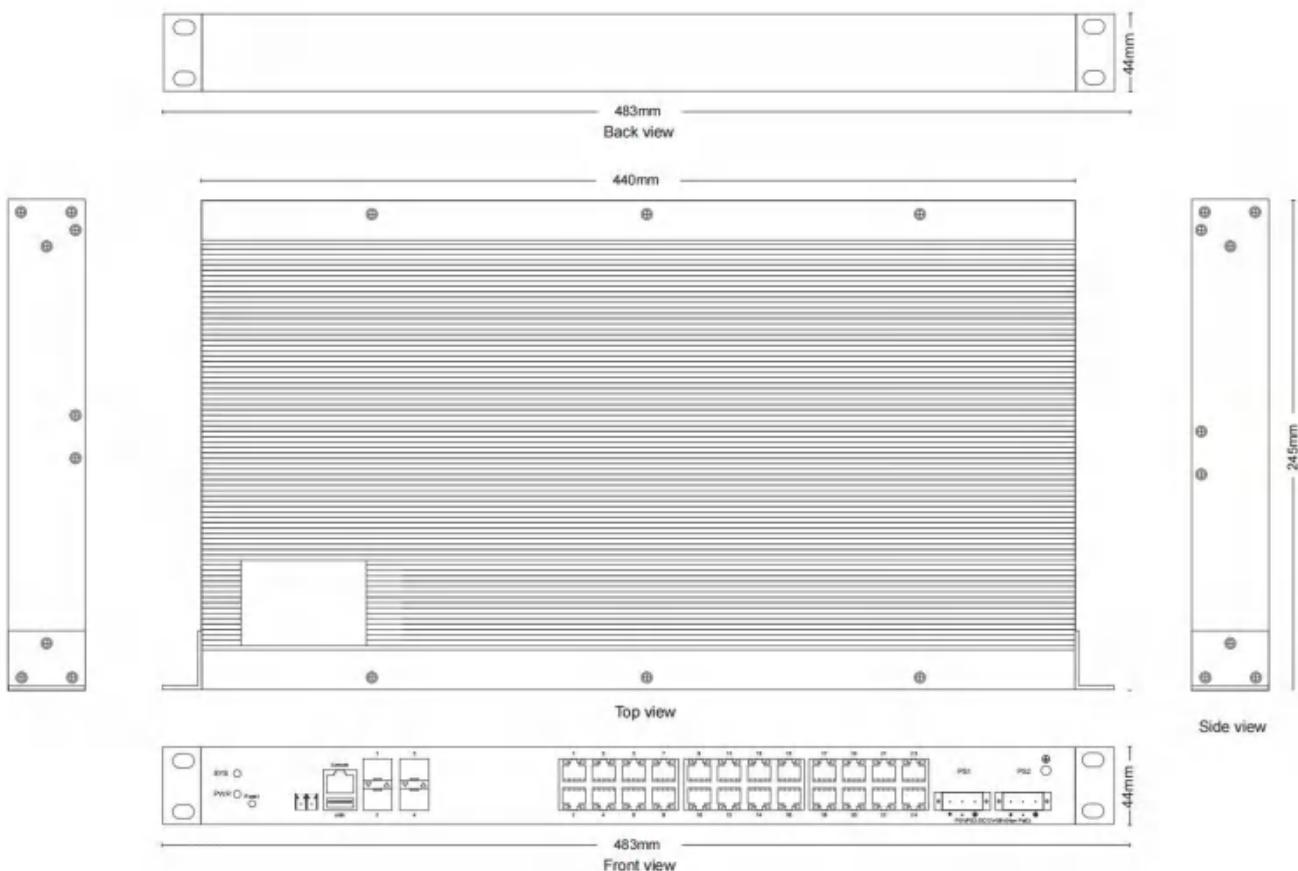
Surge Protection of Ethernet Port	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
RS	IEC 61000-4-3 Level 3 (10V/m)
EFI	IEC 61000-4-4 Level 3 (1V/2V)
CS	IEC 61000-4-6 Level 3 (10V/m)
PFMF	IEC 61000-4-8 Level 4 (30A/m)
DIP	IEC 61000-4-11 Level 3 (10V)
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Free Fall	0.5m

Certification

Certificates	CE/FCC/RoHS
--------------	-------------

Warranty

Warranty	3-Year
----------	--------

Dimension

Ordering Information

PART NO	DESCRIPTION
IRSL3LM-04X24GP-2D-Z8	Rackmount Industrial L3 Lite Managed PoE Switch 24x10/100/1000M RJ45 PoE+, Uplink 4x10G SFP+ Redundant DC48-58V input



<https://www.lanaotek.com>



Specifications & design are subject to change without prior notice.

For more details, please email to info@lanaotek.com. Copyright©2024 lanaotek.com All Rights Reserved