

CSL3LR-02S08GP-Z120w

L3 Lite Managed PoE Switch 8x10/100/1000Base-T PoE+, 2xGigabit SFP



Overview

It features 8x 10/100/1000Base-T PoE+ ports and 2x Gigabit SFP uplink ports, delivering reliable Layer 3 Lite capabilities for efficient network management. Engineered to support Power over Ethernet (PoE+) with up to 30W per port, it is ideal for powering IP cameras, wireless access points, and other PoE-enabled devices. The compact design with SFP fiber uplinks ensures flexible deployment in both enterprise and SMBs environments. Its RJ45 ports support auto - MDI/MDIX and wire-speed forwarding for efficient data transfer. Employing the store - and - forward method along with QoS technology, it ensures rational bandwidth allocation per port.

Features

- Transfer data for network surveillance cameras
- 8 x 10/100/1000Mbps RJ45 Ports PoE+, 2 x 100/1000Mbps SFP+ Ports, 1 x Console Port
- Support IEEE802.3/IEEE802.3i/IEEE802.3u/IEEE802.3ab/IEEE802.3z, store-and-forward
- Ethernet port supports 10/100/1000M adaptive and PoE functions
- Panel indicator monitoring the status and help failure analysis
- Support 802.1x port authentication, support AAA authentication, support TACACS+ authentication
- DOS attack defense settings, ACL settings
- Support WEB, TELNET, CLI, SSH, SNMP, RMON management
- Lightning Protection Surge: General Mode 4KV, Differential Mode 2KV, ESD 15KV

Specifications

Fixed Port	2*1000 Base-X, 8*10/100/1000 Base-T
Management Port	Console
Power Interface	AC triangular seat
LED Indicators	PWR, SYS, Link/ACT LED
Cable Type & Transmission Distance	
Twisted-pair	0-100m (CAT5e, CAT6)
Single Mode Optical Fiber	20/40/60/80/100KM
Multi Mode Optical Fiber	550m
Network Topology	
Ring Topology	Support
Star Topology	Support
Bus Topology	Support
Tree Topology	Support
Hybrid Topology	Support
Electrical Specifications	
Input Voltage	AC 100-240V 50/60Hz
Total Power Consumption	≤120w
PoE Support	
PoE Port	1-8
PoE Protocol	IEEE802.3 af/at
Pin Assignment	1,2+; 3,6-
PoE Management	Support
Layer 2 Switching	
Switching Capacity	20G
Packet Forwarding Rate	14.88Mpps
MAC Address Table	8K
Buffer	4.1M
Forwarding Delay	<10us
MDX/MIDX	Support
VLAN	256


GVRP	Support
Protocol VLAN	Support
Voice VLAN	Support
Surveillance VLAN	Support
MAC VLAN	Support
Ethernet Channel/ 802 .3ad	Support
LACP	Support
Interface Speed	Support
Duplex Mode	Support
Flow Control	Support
Jumbo Frame	Support
DHCP Server	Support
DHCP Client	Support
DNS Client	Support
SNTP Client	Support
Port Statistics	Support
Protected Ports	Support
EEE	Support
Ethernet Ring Protection Switching	Support
LLDP	Support
LLDP 802.1 TLV	Support
MSTP / RSTP / STP	Support
STP BPDU Filter	Support
STP BPDU Guard	Support
STP Port Fast	Support
IGMP Snooping	Support
MLD Snooping	Support
MVR	Support
DHCP Interface Priority IP Binding	Support
Device Scan	Support
Layer 3 Function	
IPv4 Management Address	Support

IPv6 Management Address	Support
Static Routes IPv4	Support 32 articles
Static Routes IPv6	Support 32 articles
ARP	Support
Loop back Interface	Support
DHCP Server	Support
DNS Server	Support
DNS Client	Support
Convergence	
ACL	Support MAC standard/extended ACL Support IPv4 standard/extended ACL Support IPv6 standard/extended ACL
QOS	Support QOS remarking Support port trust Support port speed limit Support export queue rate limit Support SP, WRR scheduling algorithm Support COS mapping, DSCP mapping, IP priority mapping
Management	
User Management	Support
System Log	Support
Upgrade Firmware	Support
Configuration File Download/Upload	Support
SNMP	Support SNMPv1/v2c/v3
WEB Management	Support
Console	Support
CLI	Support
Telnet/SSH	Support
RMON	Support
Security	
Management Channel Configuration	Support
AAA	Support
802.1X	Support
MAC-Based	Support

WEB-Based	Support
DoS Attack Prevention	Support
Dynamic ARP Check	Support
DHCP Snooping	Support
IP Source Guard	Support
Port Security	Support
Protected Port	Support
Storm Control	Support
Equipment Diagnosis	
Console Log	Support
RAM Log	Support
Flash Log	Support
Port Mirroring	Support 1:1 or M:1
Ping	Support
Trace Route	Support
Electrical Port Test	Support
Optical Module Information	Support
UDLD Protocol	Support
Environment	
Operating Temperature	-10°C ~ +50°C
Storage Temperature	-40°C ~ +70°C
Relative humidity	10% ~ 90% RH
Thermal Methods	Fan cooling
MTBF	100,000 hours
Mechanical Dimensions	
Product Size	220*161*44mm
Installation Method	Desktop installation
Net Weight	1.2kg
EMC & Ingress Protection	
Surge Protection of Power	Common mode 6KV, differential mode 2KV
Surge Protection of Ethernet port	Common mode 4KV, differential mode 2KV
ESD	Contact 8K, air 15K

Free Fall	0.5m
Certification	CE, FCC, RoHS

Dimension

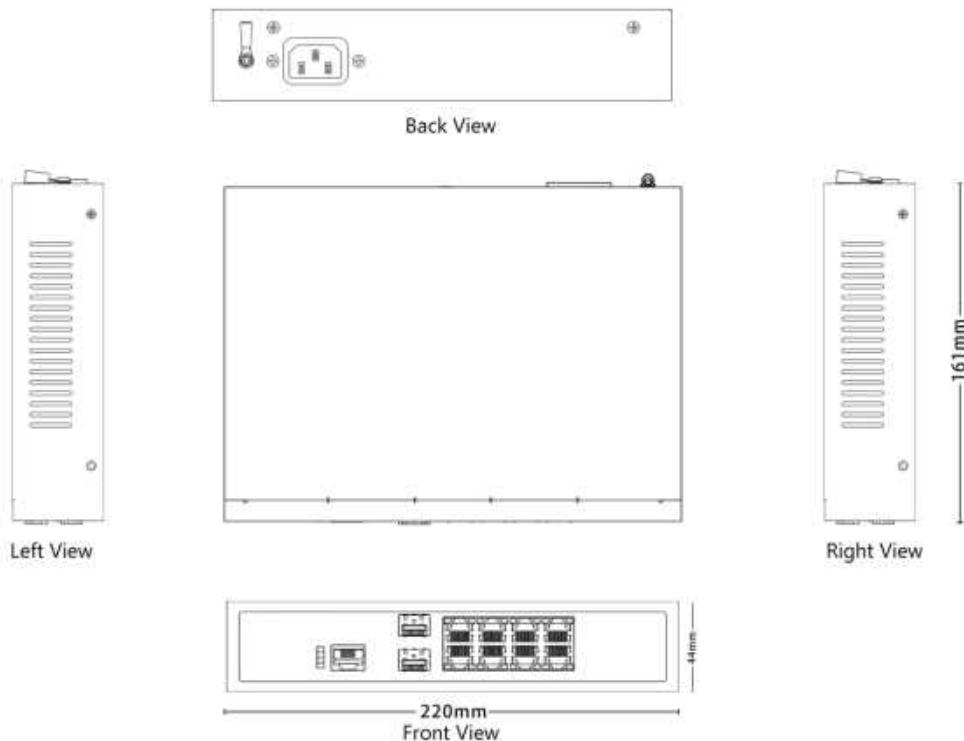

Ordering Information

P/N	Description
CSL3R-02S08GP-Z120w	L3 Lite Managed Ethernet PoE Switch 8x10/100/1000Base-T PoE+, 2xGigabit SFP



<https://www.lanaotek.com>



Specifications & design are subject to change without prior notice.

For more details, please email to info@lanaotek.com. Copyright©2021 lanaotek.com All Rights Reserved